



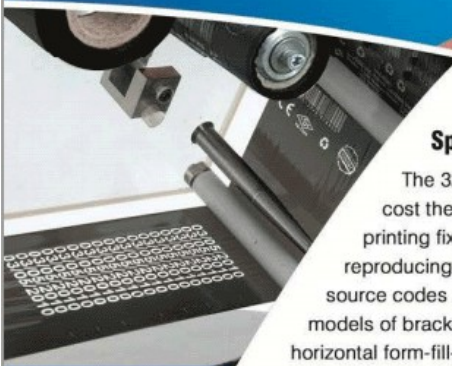

SVM 32-40 I
SVM 32 C

**THERMAL
TRANSFER
OVERPRINTERS**

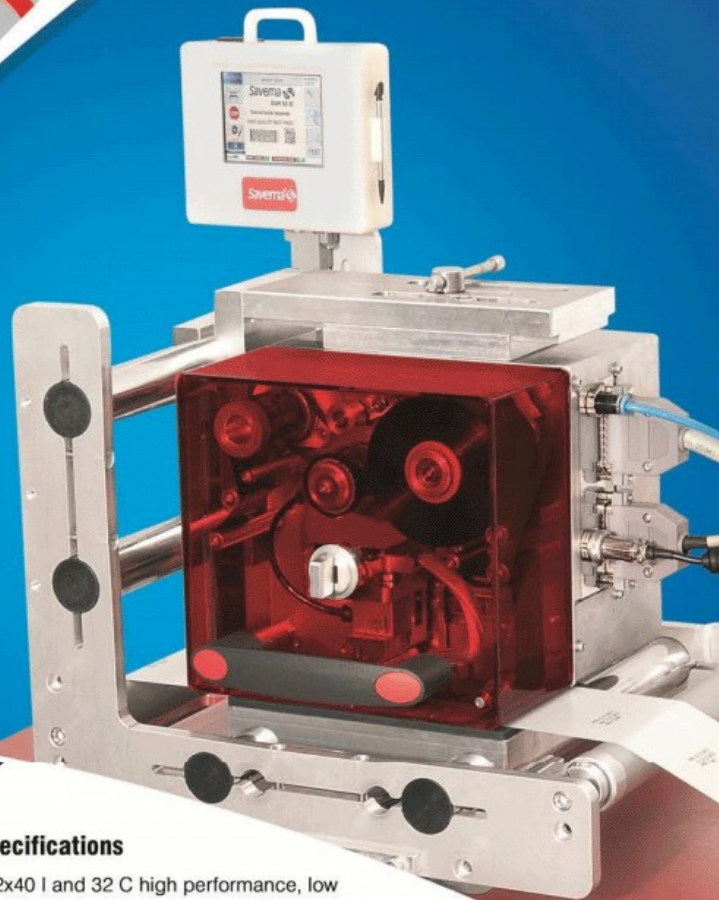

Specifications


The 32x40 I and 32 C high performance, low cost thermal transfer printers are versatile enough for printing fixed and variable text, data and graphics. It is ideal for reproducing bar codes, real time, sell-by dates, batch numbers, rices, source codes and much more. The 32x40 I and 32 C has two component models of bracket can be easily integrated to the machines such as vertical and horizontal form-fill-seal systems, primary labellers, thermo formers and overwrapping equipment. The units are suitable for all intermittant and continious applications within the food, pharmaceutical cosmetics, and automobile spare parts industries has the capability to code all kinds of 1D barcods and 2D datamatrix codes.

Key Features

- Patented long life mechanical design needs no maintenance
- 32mm x 40mm print area for intermittant and 32x100 mm for continious
- 600m ribbon capacity
- Print Quality 300dpi (12 dot / inch).
- Up to 450mm per second print speeds
- The USB can be used to: - Move messages and configurations between printers for local based set-up - Back-up and restore messages and printer settings
- Large memory for all label formats to be stored locally.

SVM 32-40 I // SVM 32 C

THERMAL TRANSFER OVERPRINTER

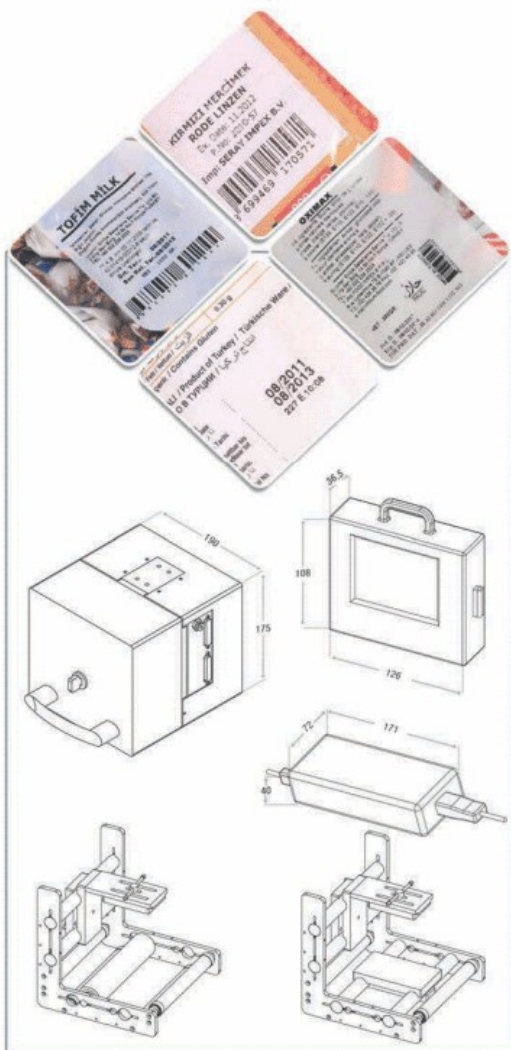

Specifications

| | 32-40 I | 32 C |
|-----------------------|--|----------------|
| Print Area | Width 32mm | Width 32mm |
| | Length 40mm | Length 100mm |
| Resolution | 12 dots/mm (300dpi) horizontally and vertically | |
| Print Speed | Up to 400mm/second | 450 mm/second |
| Production | 300 prints/min (in one line) | 400 prints/min |
| Thermal Ribbon | 600 meter (656 yds.) loaded ribbon | |
| Memory | 350 text memory | |
| | USB standart | |
| Power Supply | 110/220V / 50/60 Hz | |
| Air Supply | max. 6 bar | |
| Weight (printer) | 5kg | |
| Dimensions | 175mm H x 180mm W x 150mm D | |
| Outputs | Machine on error (failsafe) - image ready, power on, print per minute etc | |
| Ribbon Widths | 22 mm and 35 mm. (0,9" -1,4") | |
| Operating Temperature | 5°- 40°C (41° -104°F) | |
| Control Panel | 3,5" Touch Screen Panel | |

Programming

| | |
|----------------|--|
| Fields | Real DATE/Time (free format), Graphic, Serial No. Batch Shift, texts, variable fields RS 232 import, rotations (90, 180, 270°) Free fields in barcode, etc... |
| Barcodes | 1 D Barcodes (EAN-13, EAN-8, CODE 128, CODE 39, ITF -2 of 5, ITF 14, CODABAR UPC-A, UPC-E) 2 D Barcodes (Datamatrix, QR Codes, PDF 41 7, Aztec code, Semacode, Macro PDF 417) |
| Communications | RS-232 (PC), LAN, USB Multi-language (8) support standard |
| Pc Programmes | SAYASIS Label Program |



2. Organize Sanayi Yaylacak Cad.
No: 5 Konya / TURKIYE
Tel : +90 332 239 11 22
Tel&Fax: +90 332 239 13 06